


# Comparison Conductive Adhesives

Electrically conductive fibers suspended in the adhesive draw static electricity from the floor tiles and transport the charges to ground.

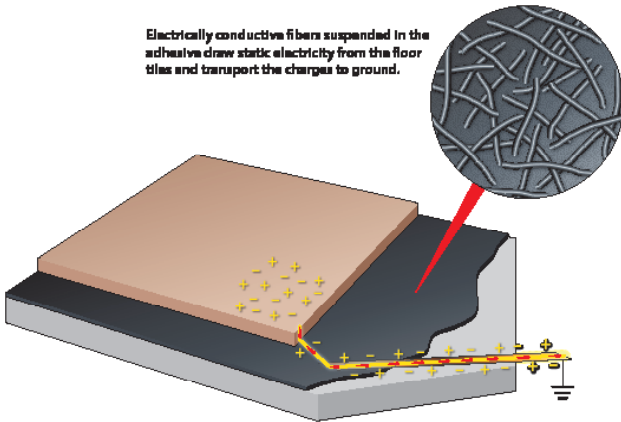

CHARACTERISTIC	GroundTack	StatBond Acrylic	StatBond Pressure-Sensitive	StatBond Two-Part Epoxy
	Releasable	Wet Set	Permanent	Wet Set
<b>Material</b>				
Wet Set	No	Yes	No	Yes
Color When Dry	Clear	Dark Gray	Clear	Black
Releasable	Yes	No	No	No
Solvent-Free	Yes	Yes	Yes	Yes
RH Tolerance	85%	85%	85%	85%
Floor Score Certified	Yes	Yes	Yes	Yes
<b>Installation</b>				
Can Be Applied to Non-Porous Surfaces	Yes	No	Yes	Yes
Ready to Apply	Yes	Yes	Yes	No, Requires Mixing
Trowel Size	1/16 square notch	1/6 square notch	1/16 square notch	1/32 x 1/6 U-Notch
Spread Rate	180-225 ft <sup>2</sup> per gallon	110-130 ft <sup>2</sup> per gallon	180-225 ft <sup>2</sup> per gallon	185-245 ft <sup>2</sup> per gallon
Open/Work Time	4 Hours	< 1 Hour	4 Hours	30 Minutes
Pressure Sensitive	Yes	No	Yes	No
Full Cure Time	120 Hours (5 days)	72 Hours (3 days)	40 Minutes	36 Hours
Can Receive Traffic Immediately	Yes	No	Yes	No
<b>Compatible Flooring Materials</b>				
Carpet Tile	Yes	No	Yes	No
Vinyl	No	Yes	Yes	Yes
Rubber	No	Yes	Yes	Yes