


# Comparison Conductive Adhesives

Electrically conductive fibers suspended in the adhesive draw static electricity from the floor tiles and transport the charges to ground.

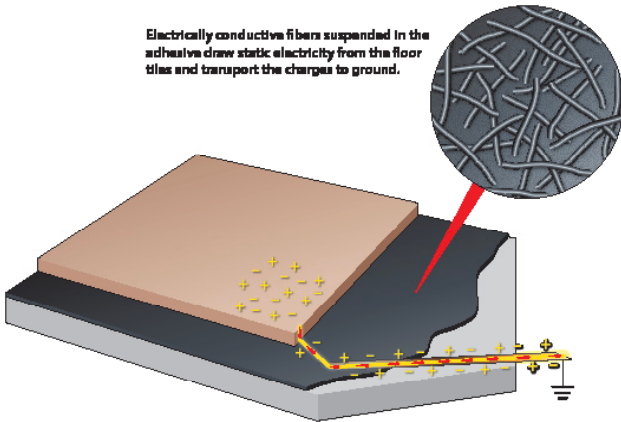

CHARACTERISTIC	GroundTack Releasable	GroundGrip ESD	StatBond Pressure-Sensitive Permanent	StatBond Two-Part Epoxy Wet Set	DryFix Dry Adhesive Tape
<b>Material</b>					
Wet Set	No	Yes	No	Yes	N/A
Color When Dry	Clear	Dark Gray	Clear	Black	No
Releasable	Yes	No	No	No	Yes
Solvent-Free	Yes	Yes	Yes	Yes	Yes
RH Tolerance	85%	85%	85%	85%	85%
Floor Score Certified	Yes	Yes	Yes	Yes	GreenGuard Gold
<b>Installation</b>					
Can Be Applied to Non-Porous Surfaces	Yes	Contact StaticWorx for instructions	Yes	Yes	Yes
Ready to Apply	Yes	Yes	Yes	No, Requires Mixing	Yes
Trowel Size	1/16" x 1/32" U-Notch	1/16" square notch	1/16" square notch	1/32" x 1/16" U-Notch	N/A
Spread Rate	180-225 ft <sup>2</sup> per gallon	110-130 ft <sup>2</sup> per gallon	180-225 ft <sup>2</sup> per gallon	185-245 ft <sup>2</sup> per gallon	N/A
Open/Work Time	4 Hours	< 1 Hour	4 Hours	30 Minutes	Indefinite
Pressure Sensitive	Yes	No	Yes	No	Yes
Full Cure Time	120 Hours (5 days)	72 Hours (3 days)	40 Minutes	36 Hours	Instant
Can Receive Traffic Immediately	Yes	No	Yes	No	Yes
<b>Compatible Flooring Materials</b>					
Carpet Tile	Yes	Yes	Yes	No	No
Vinyl	Yes	Yes	Yes	Yes	No
Rubber	No	Yes	Yes	Yes	Yes